

Product Description

A transition from open channel to closed piping or the entry of pump suction pipes are where DENZ F11 Crepine Type Strainers are fitted.

The system's primary purpose is to be protected from foreign objects like stones, sticks, and leaves coming from the pipelines. The strainer's filter blocks foreign particles that could harm important system components and keep them from entering the pipeline.

Length of the filter (Screen) can be adjusted according to the project requirements.





Production References

Size Range	DN40-1000
Pressure Range	PN10-16 (Flange Drillings)
Temperature	220 °C
Connection	EN 1092-2 Flanged
Testing	EN12266-1


Application Areas

- Water & Wastewater Systems
- Pumping Stations
- Seawater Applications
- Tanks & Reservoirs
- Chamber Installation
- Water Treatment Plants
- Pipelines





Materials & Dimensions

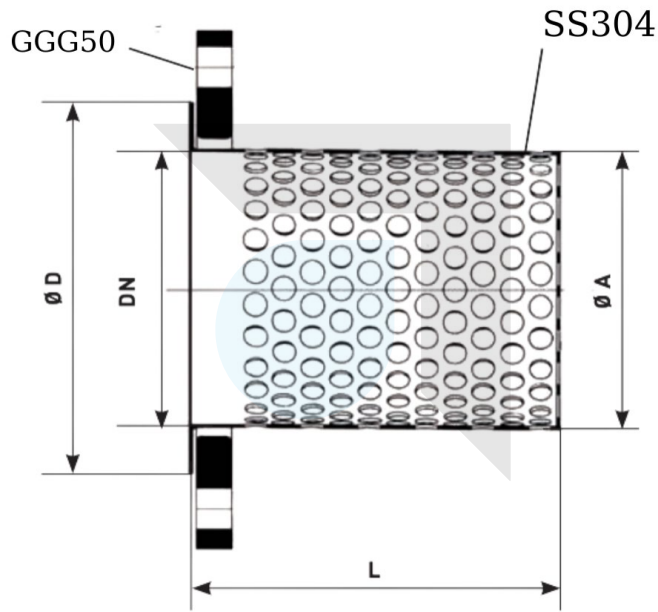

DN	A	D	n	L
40	40	80	3,5	90
50	50	90	5	100
60	65	105	5	115
80	80	125	5	130
100	100	150	5	150
125	125	175	5	175
150	150	200	5	200
200	200	250	5	250
250	250	300	8	300
300	300	350	8	350
350	350	400	8	400
400	400	450	8	450
500	500	560	8	550
600	600	660	8	650
700	700	770	8	750
800	800	875	8	900
900	900	975	8	1000
1000	1000	1080	8	1100

Units: mm / indicative dimensions & weights

